


Multi compartment tanks available
Maximum size up to 110,000 litres on request.

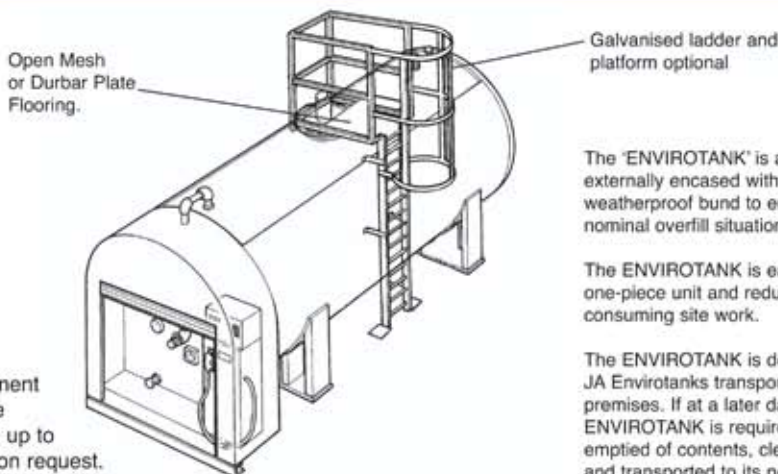

The 'ENVIROTANK' is an inner storage tank, externally encased within an outer weatherproof bund to ensure any leakage or nominal overflow situation is safely contained.

The ENVIROTANK is easily transportable as a one-piece unit and reduces costly and time consuming site work.

The ENVIROTANK is delivered by JA Envirotanks transport to the customers premises. If at a later date a new site for the ENVIROTANK is required it only has to be emptied of contents, cleaned internally, uplifted and transported to its new location.

Advantages

- Weatherproof.
- Space saving.
- Reduced maintenance costs.
- Enclosed bunded tank.
- Cuts costly site work.
- Needs only suitable hard standing.
- Easily transportable.
- Overfilled product can be re-used.
- Sizes/capacity to suit most situations.
- Finished in green or black oil resistant paint.
- Clients own in-house colours can be accommodated on request.
- Offloading and positioning facilities available if required.
- The optional security cabinet will extend the overall length of the unit by 750mm.

| Ref | Capacity Litres | Diameter mm | Approx. O/A Length mm (Excluding Cabinet) | Inner Tank Thickness mm | Weight Kg approx. |
|-----|-----------------|-------------|---|-------------------------|-------------------|
| E41 | 2000 | 1250 | 2040 | 6 | 914 |
| E42 | 5000 | 1500 | 3610 | 6 | 1906 |
| E28 | 7000 | 1900 | 3120 | 6 | 2110 |
| E43 | 10000 | 1900 | 4400 | 6 | 2940 |
| E44 | 12000 | 1900 | 5260 | 6 | 3220 |
| E29 | 13637 | 2743 | 3000 | 6 | 3370 |
| E45 | 15000 | 1900 | 6580 | 6 | 3930 |
| E30 | 18184 | 2743 | 3903 | 6 | 4070 |
| E46 | 20000 | 2500 | 5060 | 6 | 4788 |
| E31 | 22729 | 2743 | 4745 | 6 | 4910 |
| E47 | 25000 | 2500 | 6325 | 6 | 5144 |
| E48 | 25000 | 2743 | 5270 | 6 | 5144 |
| E32 | 27275 | 2743 | 5598 | 6 | 5490 |
| E49 | 30000 | 2500 | 7600 | 6 | 5702 |
| E50 | 30000 | 2743 | 6280 | 6 | 5702 |
| E33 | 31821 | 2743 | 6452 | 6 | 5950 |
| E34 | 36368 | 2743 | 7305 | 6 | 6910 |
| E51 | 40000 | 3000 | 6940 | 6 | 7372 |
| E52 | 40000 | 2743 | 8070 | 6 | 7372 |
| E35 | 40913 | 2743 | 8160 | 6 | 7580 |
| E36 | 45459 | 2743 | 8984 | 6 | 8220 |
| E53 | 50000 | 3000 | 8700 | 6 | 9422 |
| E54 | 50000 | 2743 | 10100 | 6 | 9422 |
| E37 | 54551 | 2743 | 10980 | 6 | 9730 |
| E55 | 60000 | 3000 | 10470 | 6 | 10830 |
| E56 | 60000 | 2743 | 12100 | 6 | 10830 |
| E38 | 68189 | 2743 | 13594 | 6 | 11200 |
| E57 | 80000 | 3000 | 13700 | 6 | 13650 |
| E58 | 100000 | 3000 | 17025 | 6 | 15541 |
| E59 | 110000 | 3000 | 18700 | 6 | 17294 |

Additional Fittings

- 50mm, 65mm or 80mm fill pipe c/w valves, tanker coupling and cap.
- Venting assembly sized to suit.
- Sludge drain pipe.
- 40mm outlet pipe with valve.
- Electric bund monitoring with alarm.
- Contents gauge in litres.
- Overfill alarm and/or overfill prevention valve.
- Dipstick, dip pipe, cap and chain.
- Dispensing pumps with safety break couplings and automatic nozzle. (3m hose supplied)
- Fuel monitoring systems.
- Optional galvanised ladder and platform.
- Optional distribution board and lighting.
- Optional security cabinet with aluminium roller shutter door and steel doors.