


For above or below ground use
Single, Double or Multi-Compartment

BS 799: Part 5: Type 'A' or Type 'B'
also BS 2594:

Dished and flanged ends, all welded seams.
Certified tested. Fitted with 600mm dia.
manhole with set pinned cover and gasket.

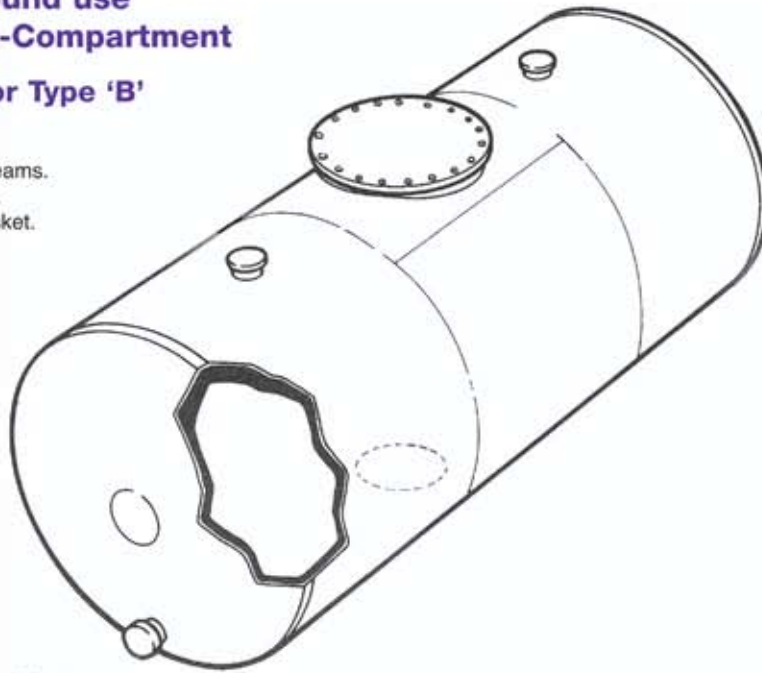

Standard connections:-

- Inclusive of B.S.P. screwed bosses to BS 21.
- Belowground tanks finished in two coats of black bitumen paint for concrete encasement.
- Aboveground tanks finished in two coats of primer or one coat zinc alkyd primer and one coat of oil resistant gloss finish.
- Alternatively finished to customers requirements.
- Calibrated dipstick, gauge and other fittings if required.

Dimensions and Capacities

Cat No.	Approx Capacity litres	Overall Length		Internal Diameter		Plate Thickness and weight		
		meters	metres	5mm	6mm	8mm		
H01	2273	1.75	1.37	400	457			
H02	2841	2.06	1.37	440	521			
H03	3409	2.44	1.37	520	622			
H04	4546	3.28	1.37	653	787			
H05	5682	3.36	1.52		953			
H06	6819	2.82	1.83		1041			
H07	7955	3.36	1.83		1165			
H08	9091	3.28	1.98		1229			
H09	9091	3.73	1.83		1254			
H10	11364	3.96	1.98		1470			
H11	11364	4.65	1.83		1508			
H12	13637	4.12	2.13		1610			
H13	13637	4.80	1.98		1749			
H14	13637	5.56	1.83		1775			
H16	18184	4.72	2.29		1965			
H17	18183	4.30	2.44		1965			
H18	22729	5.94	2.29		2394			
H19	22729	5.11	2.44		2368			
H20	27275	5.49	2.59		2572	3430		
H21	27275	5.03	2.74		2686	3581		
H22	27275	6.17	2.44		2776	3701		
H23	31821	5.79	2.74		2851	3801		
H24	36367	6.48	2.74		3343	4457		
H25	40913	7.32	2.74		3686	4915		
H26	45459	8.05	2.74		3940	5253		
H27	54551	9.75	2.74		4711	6124		
H28	68189	10.26	3.00		5419	7225		
H30	90918	13.57	3.00		6838	9117		
H31	100010	14.93	3.00		7034	9365		
H32	113647	16.91	3.00		7914	10550		
H33	136377	11.73	4.00		8590	11110		