

BS 799: Part 5: Type 'J' or 'K'

Stayed as necessary.


Certified tested.

Fitted with 600mm dia. manhole with set pinned cover and gasket.

Standard connections include two 65mm, one 40mm and one 25mm screwed sockets.

Finished externally one coat of primer followed by one coat of gloss, or to customer's requirements.

Calibrated dipstick/gauge and other fittings if required.

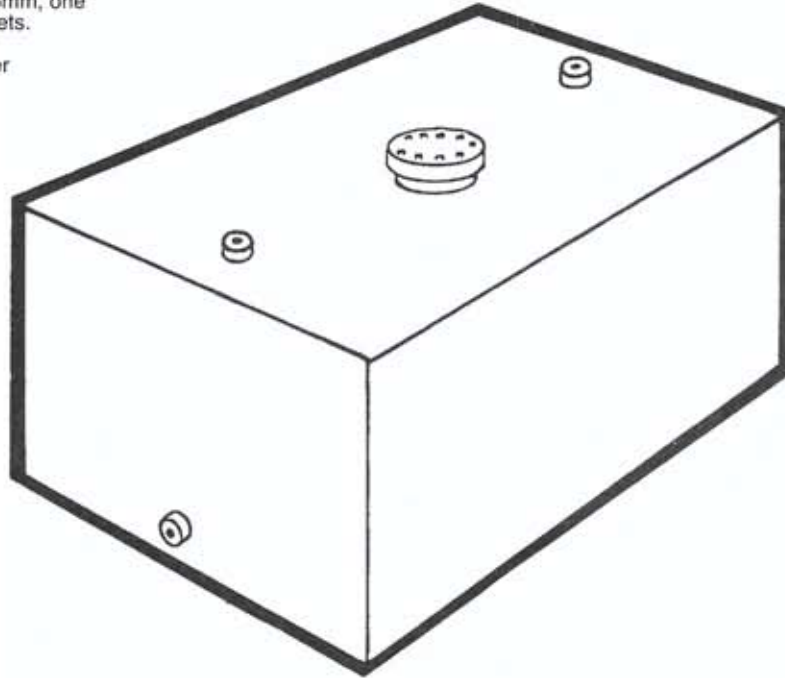

Dimensions and Capacities

Cat No.	Approx Capacity litres	Dimensions			Plate Thickness and Weight kg		
		Length mm	Width mm	Depth mm	3mm	5mm	6mm
R01	2272	1.52	1.22	1.22	305	432	559
R02	2727	1.83	1.22	1.22	343	483	635
R03	2841	1.91	1.22	1.22	343	495	648
R04	2954	1.98	1.22	1.22	356	508	674
R05	3409	2.29	1.22	1.22	394	572	750
R06	3636	2.44	1.22	1.22	423	598	788
R07	4545	2.44	1.52	1.22	470	686	901
R08	4545	3.05	1.22	1.22	495	686	940
R09	5682	2.44	1.52	1.52	495	711	940
R10	5682	3.05	1.52	1.22	559	812	1051
R11	6818	3.05	1.52	1.52		914	1204
R12	7955	2.44	1.83	1.83		965	1255
R13	9091	3.05	2.44	1.22		1127	1476
R14	9091	2.44	2.44	1.52			1408
R15	11365	3.05	2.44	1.52			1639
R16	13637	3.66	2.44	1.52			1927
R17	13637	3.05	2.44	1.83			1825
R18	18183	3.05	2.44	2.44			2243
R19	22729	3.96	2.44	2.44			2753
R20	27275	3.66	3.05	2.44			3051
R21	31821	4.27	3.05	2.44			3347
R22	36367	4.88	3.05	2.44			3775
R23	40913	5.49	3.05	2.44			4141
R24	45459	6.10	3.05	2.44			4762
R25	54551	6.10	3.05	3.05			5075

UJ

enviro tanks

Rectangular Single Skin
Storage Tanks